



vertical express

Replacement Governors

Safety First

An elevator's governor is activated when it moves, in either direction, at a higher rate of speed than its set limits. When the governor detects an overspeed situation, it activates the car safety devices, cuts the power to the drive and, if necessary, initiates the safeties. During the annual safety test performed on your elevators, it may be determined that a replacement governor is needed.

Vertical Express governors are offered in 12" and 16" diameters to accommodate a variety of rope sizes, and they are available for speeds ranging from 100 to 1200 fpm.

Benefits

- Mounting options available for car and counterweights.
- Tail weights with sheaves are available for both car and counterweights.
- 12" governors are manufactured with live shafts to accommodate encoders.
- 16" governors are manufactured with live shafts upon request.

When you order parts from Vertical Express, you can rest assured that you have a product that has been designed for consistent operation and superior performance. Contact your local Vertical Express sales representative or call (866) 448-3789 toll free.



12" Governor



16" Governor

www.verticalexpress.com

(866) 448-3789

expert service • express delivery

Replacement Governors

For Vertical Express Contractor Use Only

Once complete, fax to (901) 261-1807. Be sure to include all surveys.

Office: _____ Date: _____ By: _____

Job Name: _____ Job Number: _____

PO Number: _____ Tel: _____

To place a direct order, call (866) 448-3789.

Select Required:

Car:

- 12" Governor
- 16" Governor
- Digital Encoder
- Tail End Sheave

Counterweight:

- 12" Governor
- 16" Governor
- Tail End Sheave

Data Required:

Car Speed: _____

Rise: _____

Trip Speed: _____

Capacity: _____

Car Weight: _____

Car Rail Size: _____

Counterweight Rail Size: _____


Pull Through: _____ lbs.

Safety Type:


- Instantaneous
- Flexible Guide Clamp
- Drum Wedge Clamp

Dimensions Required:

Select Location of Car Governor:

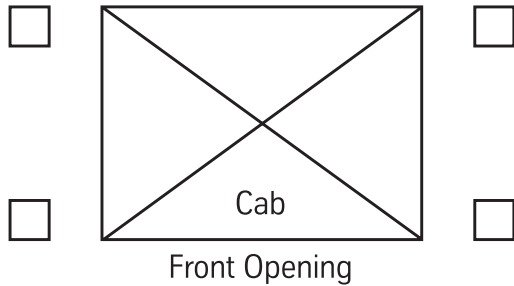

Counterweight:

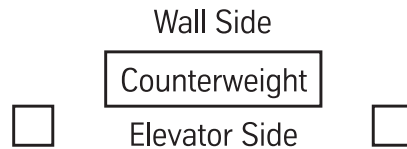

Rail Options (select one when ordering tail end sheave):

	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Size of Rail:	8 lbs	15 lbs	18.5 lbs	22.5 lbs
Back Dimension of Rail:	3.25"	5.00"	5.00"	5.50"
Blade Size:	5/8"	5/8"	3/4"	1 1/8"

Vertical Express